



VGA port




DVI-D port



HDMI port

Features

- Meets EIA310c & IEC-3 specification
- 1U, Dual slide rail, 17" or 19" LCD Keyboard drawer
- Built-in 17" LCD monitor, 1280x 1024 resolution
Option: 19", 1280x 1024 LCD monitor
- VGA or DVI-D or HDMI or DP input for LCD display
- USB or PS2 keyboard with touchpad
- Industrial keyboard with touchpad
- Includes a key-locking mechanism to prevent unauthorized access
- Built-in rail self-locking device
- Tempered glass protect LCD screen

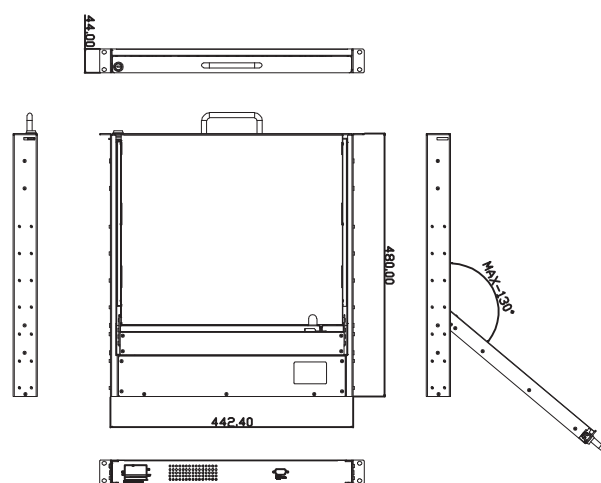

Specification

Model No	AMK701	AMK701-V	AMK701-H	AMK701-Y
Construction	Heavy-duty steel			
Drawer design	1U, Dual slide rail LCD KB drawer for 19" cabinet Enable independent extraction of LCD or KB alone			
Display	17", 1280x 1024 resolution with tempered glass Option: 19", 1280x 1024 with tempered glass			
Protection	Tempered glass protect LCD screen			
Physical security	Key locking mechanism			
Ports switch	VGA input, USB KB/MS	DVI-D input, USB KB/MS	HDMI input, USB KB/MS	DP input, USB KB/MS
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US			
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C			
Power consumption	3 watts stand-by, 25 watts in-use			
Dimension	442.4x 44x 480mm (Wx Hx D)			
Weight	12 kgs			
KVM cable	VGA/ USB	DVI-D/ USB	HDMI/ USB	DP/ USB

Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

Ordering Information

AMK701-17UBUS

1U, dual rail, 17" LCD, VGA, USB KB/MS, 1.8m VGA/USB cable

AMK701-19UBUS

1U, dual rail, 19" LCD, VGA, USB KB/MS, 1.8m VGA/USB cable

AMK701-17UBVUS

1U, dual rail, 17" LCD, DVI, USB KB/MS, 1.8m DVI/USB cable

AMK701-19UBVUS

1U, dual rail, 19" LCD, DVI, USB KB/MS, 1.8m DVI/USB cable

AMK701-17UBHUS

1U, dual rail, 17" LCD, HDMI, USB KB/MS, 1.8m HDMI/USB cable

AMK701-19UBHUS

1U, dual rail, 19" LCD, HDMI, USB KB/MS, 1.8m HDMI/USB cable

AMK701-17UBYUS

1U, dual rail, 17" LCD, DP, USB KB/MS, 1.8m DP/USB cable

AMK701-19UBYUS

1U, dual rail, 19" LCD, DP, USB KB/MS, 1.8m DP/USB cable

Option:

80W, 24~48VDC power supply

- 48VDC power supply

Touch screen

Sunlight readable (High brightness)