



VGA port



DVI-D port



HDMI port

Specification

Model No	AMK801	AMK801-V	AMK801-H	AMK801-Y
Construction	Heavy-duty steel			
Drawer design	1U, single slide rail LCD KB drawer for 19" cabinet			
Display	17", 1280x 1024 resolution with tempered glass Option: 19", 1280x 1024 with tempered glass			
Protection	Tempered glass protect LCD screen			
Physical security	Key locking mechanism			
Ports switch	VGA input, USB KB/MS	DVI-D input, USB KB/MS	HDMI input, USB KB/MS	DP input, USB KB/MS
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US			
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C			
Power consumption	3 watts stand-by, 25 watts in-use			
Dimension	442.4x 44x 480mm (Wx Hx D)			
Weight	12 kgs			
KVM cable	VGA/ USB	DVI-D/ USB	HDMI/ USB	DP/ USB

Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	




PS2 KVM Cable



USB KVM Cable

Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17" or 19" LCD KB drawer
- Built-in 17" LCD monitor, 1280x 1024 resolution
Option: 19", 1280x 1024 LCD monitor
- VGA or DVI-D or HDMI or DP input for LCD display
- USB or PS2 keyboard with touchpad
- Industrial keyboard with touchpad
- Includes a key-locking mechanism to prevent unauthorized access
- Built-in rail self-locking device
- Tempered glass protect LCD screen

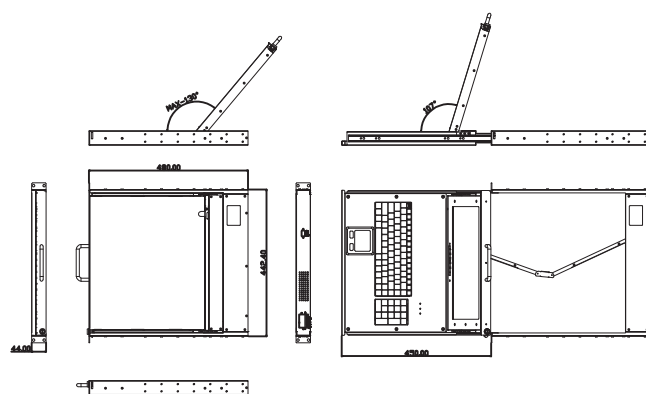

Ordering Information

AMK801-17UBUS

1U, 17", 1280x 1024 LCD, VGA, USB KB/MS, 1.8m VGA/USB cable

AMK801-19UBUS

1U, 19", 1280x 1024 LCD, VGA, USB KB/MS, 1.8m VGA/USB cable

AMK801-17UBVUS

1U, 17", 1280x 1024 LCD, DVI, USB KB/MS, 1.8m DVI/USB cable

AMK801-19UBVUS

1U, 19", 1280x 1024 LCD, DVI, USB KB/MS, 1.8m DVI/USB cable

AMK801-17UBHUS

1U, 17", 1280x 1024 LCD, HDMI, USB KB/MS, 1.8m HDMI/USB cable

AMK801-19UBHUS

1U, 19", 1280x 1024 LCD, HDMI, USB KB/MS, 1.8m HDMI/USB cable

AMK801-17UBYUS

1U, 17", 1280x 1024 LCD, DP, USB KB/MS, 1.8m DP/USB cable

AMK801-19UBYUS

1U, 19", 1280x 1024 LCD, DP, USB KB/MS, 1.8m DP/USB cable

Option:

80W, 24~48VDC power supply

- 48VDC power supply

Touch screen

Sunlight readable (High brightness)