

W32L300-65A3

32" IP65 Stainless Chassis Display



KEY FEATURES

- 32", 1920 x 1080
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)




SPECIFICATIONS

| Display | |
|------------------------------|--|
| Resolution | 1920x1080 |
| Contrast Ratio | 4000:1 |
| Display Color | 16.7M Colors |
| Active Area | 698.4x392.85 mm |
| Size | 32 inches |
| Panel Brightness | 400 nits |
| View Angles | 89,89,89,89 |
| Touch / Glass | Protection Glass |
| Mechanical | |
| Dimension | 785 x 475 x 87.8 mm |
| Enclosure | Stainless Housing |
| Mounting | VESA Mount |
| Cooling System | Fanless design |
| Environment | |
| Operating Humidity | 10% to 90% RH, Non-Condensing |
| Storage Temperature | -20°C to 60°C |
| Operating Temperature | 0°C to 45°C |
| IP rating | IP65 |
| Certification | |
| Certification | CE, FCC |
| IO Ports | |
| Power Input | 1 x M12 waterproof connector for 24V DC |
| Video | 1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional) |
| Indicator | 1 x LED Indicator for power 1 x LED Indicator for status |
| Control | |
| Button | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button |
| Accessory | |
| Accessory | 100~240V AC to DC Adapter with waterproof connector Power Cord External VGA cable with waterproof connector Waterproof caps Manual VESA screws |
| Optional Accessory | External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector (Optional) External Power cable with waterproof connector (For AC power build in) (Optional) |

Power

Power Rating 24V DC (M12 type)

DIMENSIONS UNIT:MM

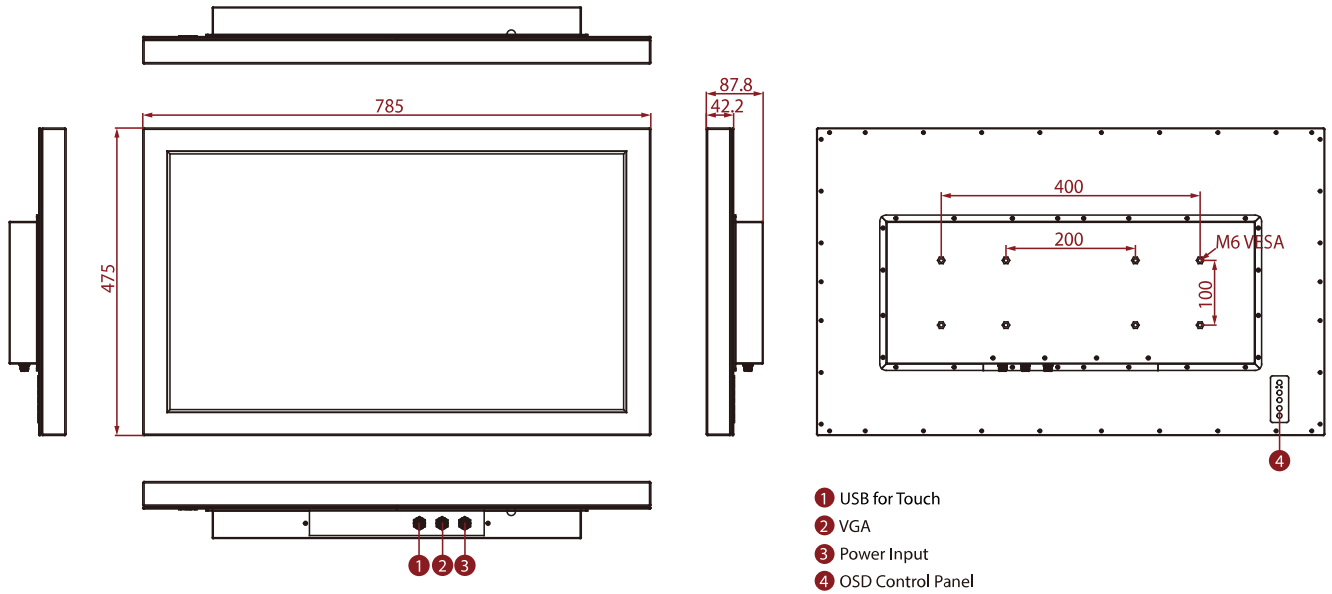

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.