

R12L100-VMM2

12.1" G-WIN VM Series Display



KEY FEATURES

- High Quality 12.1" panel, 1024 x 768 resolution, 500 nits
- 5 Wire resistive touch screen
- -10 ~ +55°C Wide Range Operating Temperature
- Anti-Corrosion housing with Fanless Design
- 9V ~ 36V DC Isolation Wide Range Power Input



SPECIFICATIONS

Display	
Resolution	1024x768
Contrast Ratio	1000:1
Display Color	16.2M Colors
Active Area	245.76 x 184.32 mm
Size	12.1 inches
Panel Brightness	500 nits
View Angles	89,89,89,89
Touch / Glass	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
Environment	
Operating Humidity	10% to 95% (Non-Condensing)
Storage Temperature	-30°C~70°C
Vibration	Operating: 1.60/1.96/2.18 g rms for XYZ / 5-500Hz
Operating Temperature	-10°C~55°C
Shock	Operating:30g for 18ms
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB for Touch Screen (Optional)
Video	1 x VGA 1 x DVI (Optional) 1 x S-Video (Optional) 1 x Composite (Optional)
Serial Port	1 x RS232 for Touch Screen (Optional)
Mechanical	
Dimension	307 x 224 x 43.90 mm
Enclosure	Metal Housing with Aluminum Bezel
Mounting	VESA Mount
Cooling System	Fanless Design
Accessory	
Accessory	User Manual(Hardcopy) Touch Driver CD 3 Pin Terminal Block AC Adapter Power Cord Mounting Bracket
Power	


Power Rating 9V~36V DC In Terminal Block

Control

Button 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

Winmate R12L100-VMM2

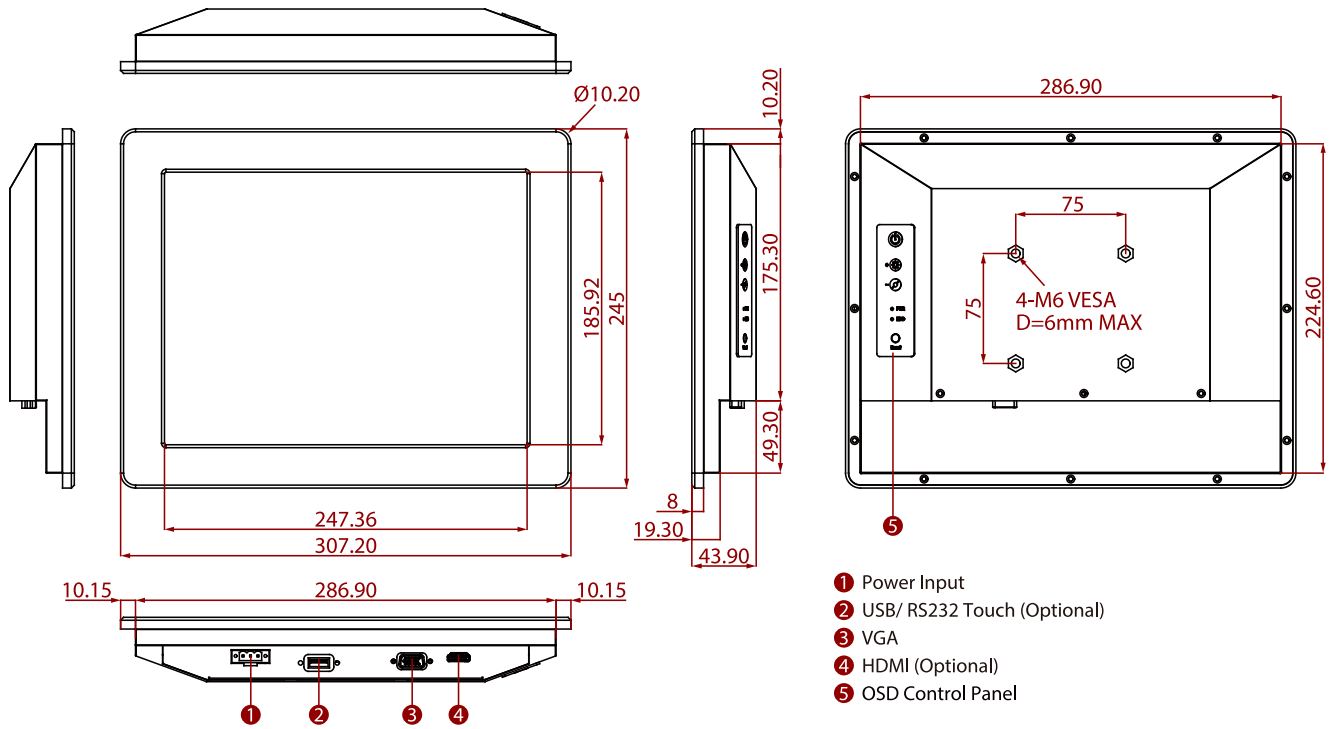

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.